


BOTTOM BAR LOCK	
TYPE	OPERATION
SLIDE BOLT	<input type="checkbox"/> INSIDE <input type="checkbox"/> OUTSIDE
CYLINDER	<input type="checkbox"/> <input type="checkbox"/>
NO LOCKING	<input type="checkbox"/>

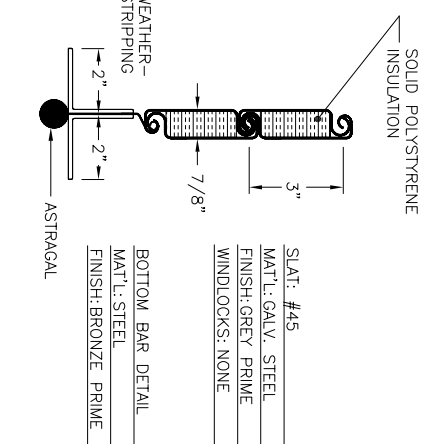

- NOTES:
1. GENERAL SPECIFICATIONS SEE SHEET 1.
 2. APPROX. WT. OF DOOR IS _____ WT LBS.
 3. DOOR DESIGNED TO WITHSTAND 20 PSF WINDLOAD.
 4. THIS DRAWING COVERS GENERAL CONDITIONS, DIMS, AND SPECIFICATIONS ONLY. DO NOT USE FOR INSTALLATION PURPOSES. INSTALLATION INSTRUCTIONS AND DIMENSIONS ARE INCLUDED WITH SHIPMENT.

DIMENSIONS AND CLEARANCES AS NOTED BY ASTERISK (*) MUST BE FIELD CHECKED.

VERIFIED BY: _____ ON: _____

NO CANCELLATIONS OR RETURNS ON THIS ORDER:

Signature: _____

MAKE	HAND	ARCH. MARK	DOOR MARK
	AS SHOWN		
	OPPOSITE		

NO.	BY	DATE	REVISION
1			ORIGINAL DRAWING



INSULATED SERVICE DOOR || CHAIN OPER || FACEMTD

JOB: _____

CONTRACTOR: _____

ARCHITECT: _____

DISTRIBUTOR: _____

DRAWING NO. _____ OF _____