
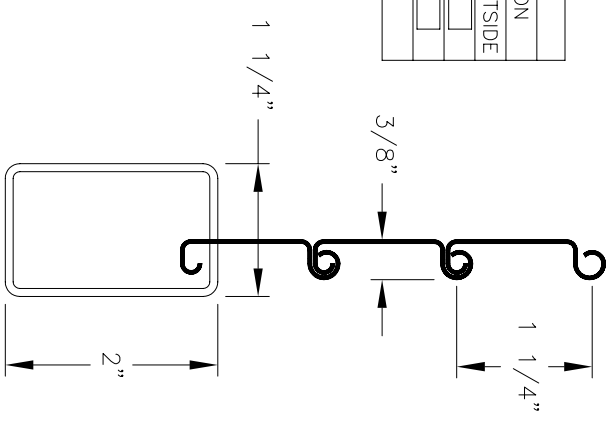


BOTTOM BAR LOCK		
TYPE	OPERATION	
THUMBTURN	INSIDE	OUTSIDE
CYLINDER	<input type="checkbox"/>	<input type="checkbox"/>
NO LOCKING	<input checked="" type="checkbox"/>	<input type="checkbox"/>

*VERIFY WALL CONSTRUCTION

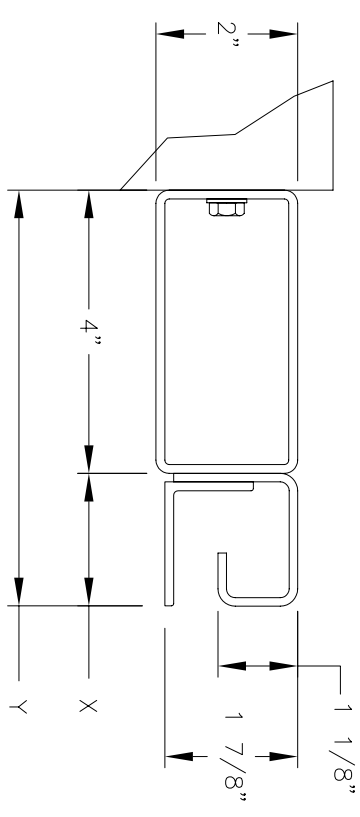

SLAT DETAIL: #10
 MAT'L: GALV. STEEL
 FINISH: GREY PRIME

BOTTOM BAR DETAIL
 MAT'L: STEEL
 FINISH: BRONZE PRIME

GUIDE DETAIL
 MAT'L: STEEL
 FINISH: BRONZE PRIME

NOTES:

1. GENERAL SPECIFICATIONS SEE SHEET 1.
2. APPROX. WT. OF DOOR IS WT LBS.
3. AMARR DOOR COMPANY ASSUMES THAT THE FIRE DOOR(S), THE WALL AND/OR MOUNTING CONDITIONS, ALONG WITH THE FASTENERS USED IN ATTACHING THE DOOR(S) TO THE STRUCTURE MEET WITH THE "AUTHORITY HAVING JURISDICTION'S" APPROVAL. FOR FURTHER REFERENCE CONSULT N.F.P.A. BULLETIN 80.
4. PROVIDE ADEQUATE CLEARANCE FOR WIRING MOTOR.
5. ELECTRICAL INFORMATION:
 VOLTAGE _____ PHASE _____
 CONTROLLER NEMA 1
 CONTROL STATION NEMA 1
 PUSH BUTTON SURFACE MTD
 KEY STATION FLUSH MTD


DIMENSIONS AND CLEARANCES AS NOTED BY ASTERISK (*) MUST BE FIELD CHECKED.

VERIFIED BY: _____ ON: _____

NO CANCELLATIONS OR RETURNS ON THIS ORDER:

Signature: _____

MAKE	HAND	ARCH. MARK	DOOR MARK
	AS SHOWN		
	OPPOSITE		
NO.	BY	DATE	ORIGINAL DRAWING REVISION
△ 3			
△ 2			
△ 1			

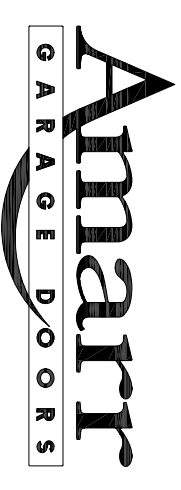

JOB: _____
 CONTRACTOR: _____
 ARCHITECT: _____
 DISTRIBUTOR: _____
 DRAWING NO. _____ OF _____