
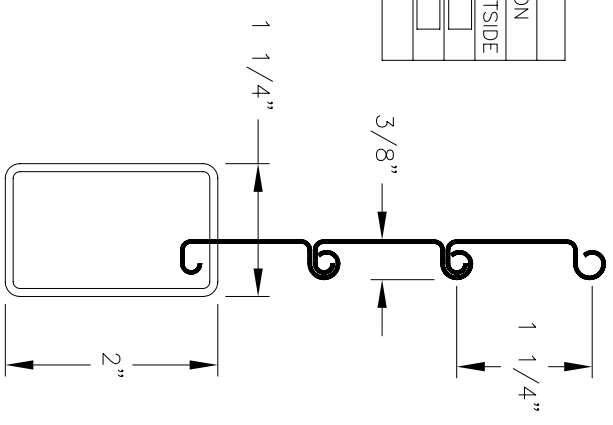


*VERIFY WALL CONSTRUCTION

BOTTOM BAR LOCK TYPE	OPERATION	
	INSIDE	OUTSIDE
THUMBTURN	<input type="checkbox"/>	<input type="checkbox"/>
CYLINDER	<input type="checkbox"/>	<input type="checkbox"/>
NO LOCKING	<input type="checkbox"/>	<input type="checkbox"/>

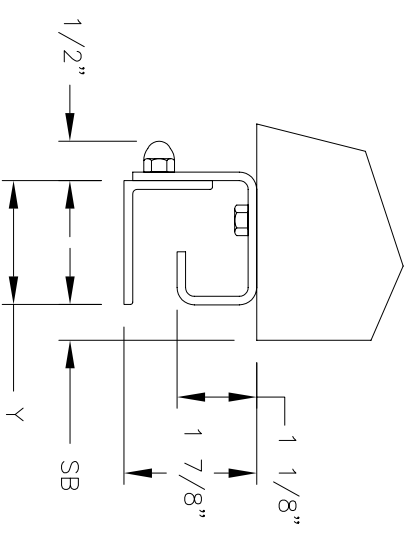

GUIDE DETAIL
 MAT'L: STEEL
 FINISH: BRONZE PRIME

SLAT DETAIL: #10
 MAT'L: GALV. STEEL
 FINISH: GREY PRIME

BOTTOM BAR DETAIL
 MAT'L: STEEL
 FINISH: BRONZE PRIME


- NOTES:
1. GENERAL SPECIFICATIONS SEE SHEET 1.
 2. APPROX. WT. OF DOOR IS WT LBS.
 3. AMARR DOOR COMPANY ASSUMES THAT THE FIRE DOOR(S), THE WALL AND/OR MOUNTING CONDITIONS, ALONG WITH THE FASTENERS USED IN ATTACHING THE DOOR(S) TO THE STRUCTURE MEET WITH THE "AUTHORITY HAVING JURISDICTION'S" APPROVAL. FOR FURTHER REFERENCE CONSULT N.F.P.A. BULLETIN 80.

DIMENSIONS AND CLEARANCES AS NOTED BY ASTERISK (*) MUST BE FIELD CHECKED.
 VERIFIED BY: _____ ON: _____

NO CANCELLATIONS OR RETURNS ON THIS ORDER:
 Signature: _____

MAKE	HAND	ARCH. MARK	DOOR MARK
	AS SHOWN		
	OPPOSITE		

NO.	BY	DATE	ORIGINAL DRAWING	REVISION
3				
2				
1				

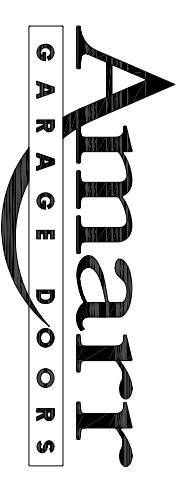

COUNTER FIRE DOOR || PUSHUP || FACEMTD

JOB: _____
 CONTRACTOR: _____
 ARCHITECT: _____
 DISTRIBUTOR: _____
 DRAWING NO. _____ OF _____