


BOTTOM BAR LOCK			
TYPE	OPERATION		INTER LOCK
	INSIDE	OUTSIDE	
SLIDE BOLT	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
CYLINDER	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
NO LOCKING	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

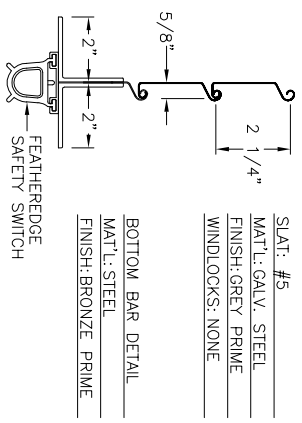

NOTES:
 1. GENERAL SPECIFICATIONS SEE SHEET 1.
 2. APPROX. WT. OF DOOR IS _____ WT LBS.
 3. PROVIDE ADEQUATE CLEARANCE FOR WIRING MOTOR.
 4. ELECTRICAL INFORMATION:
 VOLTAGE _____ PHASE _____
 CONTROLLER NEMA 1 _____
 CONTROL STATION NEMA 1 _____
 PUSH BUTTON SURFACE MTD
 KEY STATION FLUSH MTD
 5. DOOR DESIGNED FOR 25 CYCLES PER DAY.
 6. DOOR DESIGNED TO WITHSTAND 20 PSF WINDLOAD.
 7. THIS DRAWING COVERS GENERAL CONDITIONS, DIMS AND SPECIFICATIONS ONLY. DO NOT USE FOR INSTALLATION PURPOSES. INSTALLATION INSTRUCTIONS AND DIMENSIONS ARE INCLUDED WITH SHIPMENT.

DIMENSIONS AND CLEARANCES AS NOTED BY ASTERISK (*) MUST BE FIELD CHECKED.
 VERIFIED BY: _____ ON: _____
 NO CANCELLATIONS OR RETURNS ON THIS ORDER:
 Signature: _____

MAKE	HAND	ARCH. MARK	DOOR MARK
	AS SHOWN		
	OPPOSITE		

NO.	BY	DATE	REVISION
1			ORIGINAL DRAWING
2			
3			



SERVICE DOOR || H MTR OPER || FACEMTD

JOB: _____
 CONTRACTOR: _____
 ARCHITECT: _____
 DISTRIBUTOR: _____
 DRAWING NO. _____ OF _____