


BOTTOM BAR LOCK		
TYPE	OPERATION	INTER LOCK
SLIDE BOLT	<input type="checkbox"/> INSIDE <input type="checkbox"/> OUTSIDE	<input type="checkbox"/>
CYLINDER	<input type="checkbox"/>	<input type="checkbox"/>
NO LOCKING	<input type="checkbox"/>	<input type="checkbox"/>

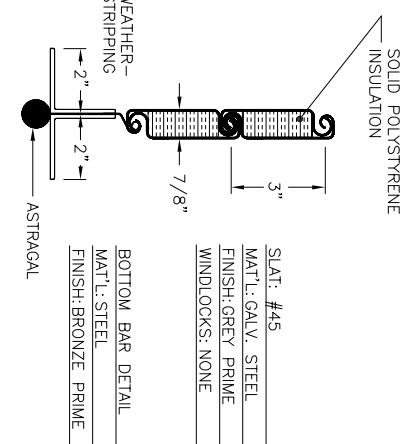

INSULATED SERVICE DOOR || BELT DRIVE MTR OPER || FACEMTD

- NOTES:
1. GENERAL SPECIFICATIONS SEE SHEET 1.
 2. APPROX. WT. OF DOOR IS _____ WT LBS.
 3. PROVIDE ADEQUATE CLEARANCE FOR WIRING MOTOR.
 4. ELECTRICAL INFORMATION:
 - VOLTAGE _____ PHASE _____
 - CONTROLLER NEMA 1
 - CONTROL STATION NEMA 1
 - PUSH BUTTON SURFACE MTD
 - KEY STATION FLUSH MTD
 5. DOOR DESIGNED FOR 25 CYCLES PER DAY.
 6. DOOR DESIGNED TO WITHSTAND 20 PSF WINDLOAD.
 7. THIS DRAWING COVERS GENERAL CONDITIONS, DIMS AND SPECIFICATIONS ONLY. DO NOT USE FOR INSTALLATION PURPOSES. INSTALLATION INSTRUCTIONS AND DIMENSIONS ARE INCLUDED WITH SHIPMENT.

DIMENSIONS AND CLEARANCES AS NOTED BY ASTERISK (*) MUST BE FIELD CHECKED.

VERIFIED BY: _____ ON: _____

NO CANCELLATIONS OR RETURNS ON THIS ORDER:

Signature: _____

MAKE	HAND	ARCH. MARK	DOOR MARK
	AS SHOWN		
	OPPOSITE		

NO.	BY	DATE	REVISION
1			ORIGINAL DRAWING
2			
3			



JOB: _____

CONTRACTOR: _____

ARCHITECT: _____

DISTRIBUTOR: _____

DRAWING NO. _____ OF _____